


Spiro 794 ↓ × 450 ↔ E7
colour: RAL 6001



TERMA
SINCE 1990







Podłączenia:




Available sizes:



566 x 450
 ↕ ↔

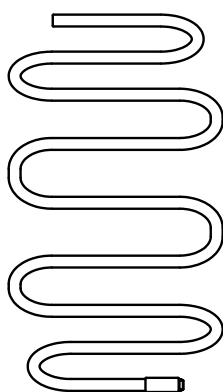

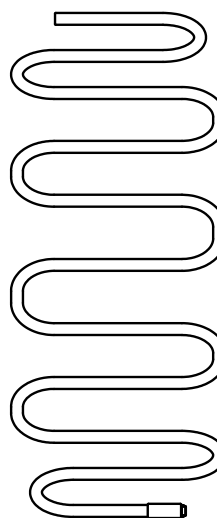


794 x 450



1062 x 450


Specification:

A ↕ [mm]	B ↔ [mm]	 [W]	D [mm]	E [mm]	F [mm]	 [kg]	Product code <small>Configuration code p. 5</small>
Farba							
566	450	110	240	227	170	4,41	WSSPI056045
794	450	165	240	455	170	5,66	WSSPI079045
1062	450	205	240	723	170	6,93	WSSPI106045
Powłoka galwaniczna							
566	450	80	240	227	170	4,30	WSSPI056045
794	450	110	240	455	170	5,52	WSSPI079045
1062	450	130	240	723	170	6,76	WSSPI106045




Technical drawing:


E7

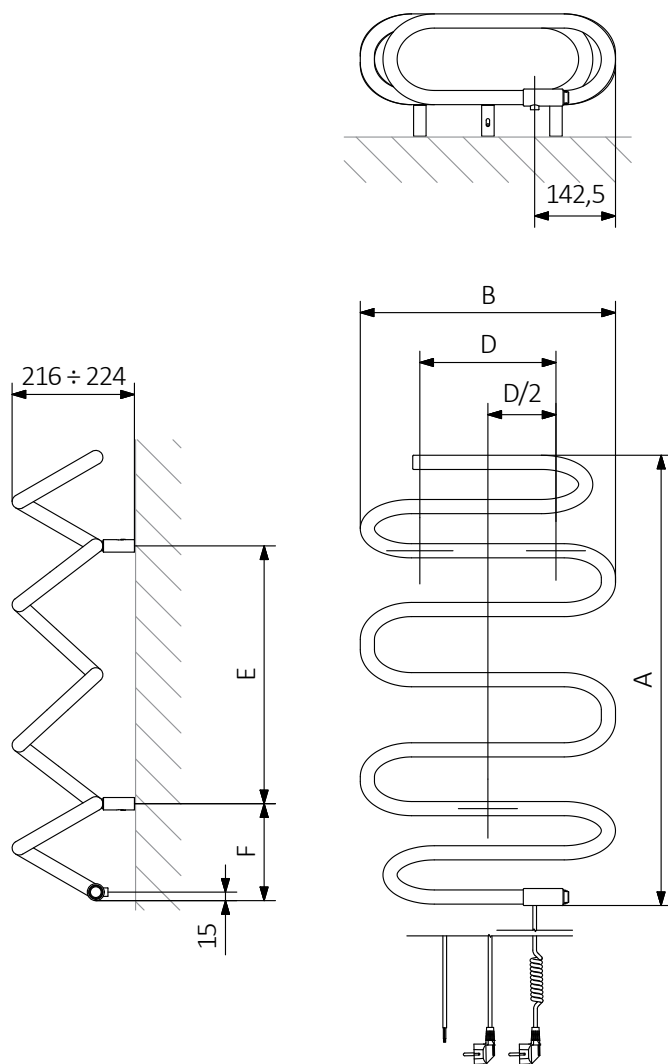

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
 E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe :





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

Construction of electric heater configuration code:

WSSPI056045

PRODUCT CODE
(located in the table for the product)

K916E7

CONFIGURATION CODE
(supplemented by hand)

Example Configuration


K **916** **E7**

Package code Colour code Connection code
K - carton box

Epoxy primer

E - Code of epoxy primer is an extra processes.

WSSPI056045 K916E7 **E** — Extra processes or additions code



Legend




Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.