

FORM UP



The Form F2 radiator is standard produced in the FORM UP model. Just the turning of the capital and the insertion of a lamp in the upper part transforms the radiator and

its traditional heating function into a new item of décor in which light lives alongside heat and a suffused glow creates all the atmosphere you need.

The FORM UP model requires the application of a halogen light-bulb from 100 to 300 W. The depth of the radiator from the wall is a modest 14.5 cm.

DIMENSIONS

Width 32/80 every 6 cm
 Height 180/190/200/210 cm
 Depth 14,5 cm
 Depth from wall 14,5 cm

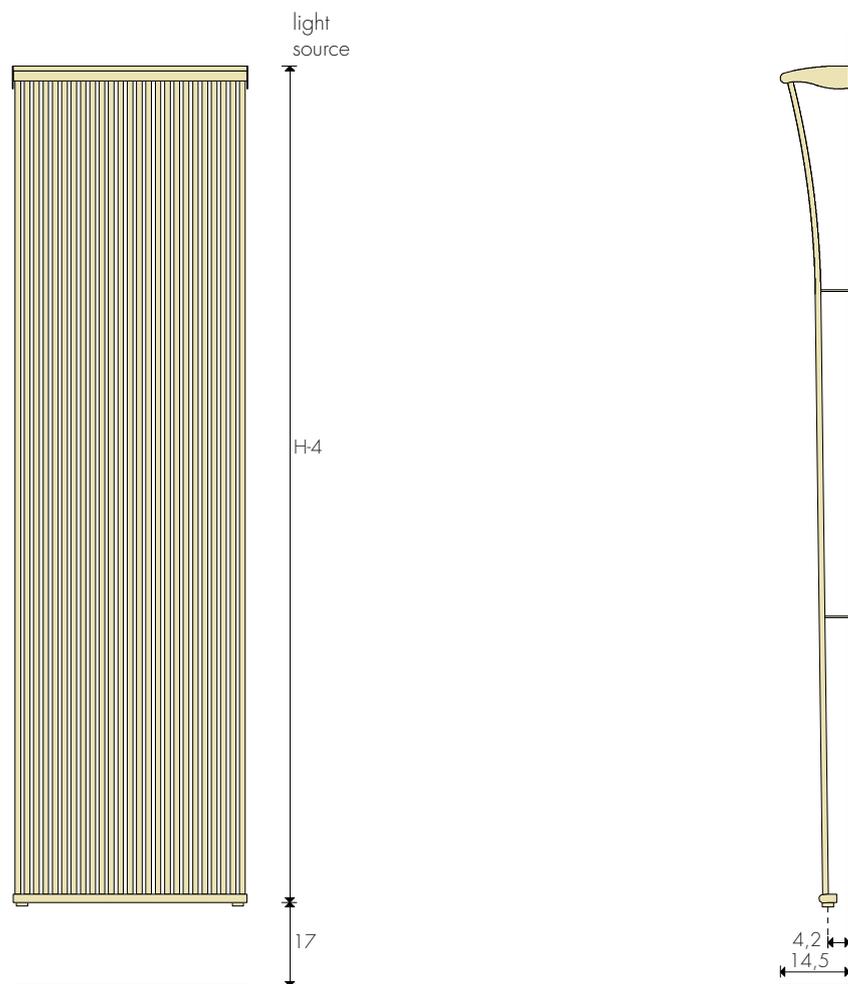

MOD.	L cm	32	38	44	50	56	62	68	EN 442 Watt Δt 50 K	
H cm	(n° tubes)	(16t)	(19t)	(22t)	(25t)	(28t)	(31t)	(34t)	74	80
									(37t)	(40t)
FUP 180	€	864,40 742w	898,60 882w	942,50 1021w	981,70 1160w	1056,20 1299w	1119,90 1438w	1194,30 1578w	1259,20 1717w	1333,70 1856w
FUP 190	€	895,20 778w	930,30 923w	964,50 1069w	1017,10 1215w	1082,60 1361w	1161,30 1507w	1228,80 1652w	1305,00 1798w	1374,60 1944w
FUP 200	€	923,80 816w	951,10 969w	997,00 1122w	1040,60 1275w	1120,90 1427w	1191,60 1580w	1271,80 1733w	1341,40 1886w	1413,70 2039w
FUP 210	€	941,80 852w	981,70 1012w	1018,60 1171w	1074,30 1331w	1147,60 1491w	1231,80 1650w	1303,10 1810w	1376,70 1970w	1451,30 2130w

120 W halogen light-bulb supplied

Δt different from 50 K: technical data Brem

STANDARD PRODUCTION

White "sablé" paintwork - white M..brackets
 Tolerance ± 3 mm - Air vent ø 1/8"
 Maximum working pressure: 8 Bar

PRODUCTION ON REQUEST

Brem color chart painting with M4C, M8C
 chrome-plated brackets +15/25%
 Supports and fixings p. 289

STANDARD FITTING

EG ø 1/2"
 ▲▽ (t.c.) = L - 4 cm

