

Price for items with White RAL 9010 finish and standard connectors. VAT and transport costs not included. For correction factors different to  $\Delta T50^{\circ}\text{C}/\Delta T30^{\circ}\text{C}$  see page 284-289


Model TEKNO is created with 14 mm diameter vertical tubular steel elements vertically arranged and coupled to a rear grate. On request this radiator can be supplied in HORIZONTAL version. For feasibility and for technical drawings please ask our technical department.

To identify the radiator model to be ordered, proceed as follows: identify and specify the code (e.g. TV, Tekno Vertical), the height (e.g. 200), the number of elements (e.g. 15 equal to a width of 67,5), the type of connector (e.g. OC1), the support code (e.g. ST), and lastly the colour (e.g. white RAL 9010).

Therefore, in this example the complete code is:  
TV# 200 018 OC1 ST 9010

**ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)**

- The additional charges are calculated on the base price of RAL 9010.
- C0 Category without any additional charge (RAL 9010)
- C1 Category +10%
- C1/C2 Category +15%
- C3 Category +20%
- RAL colours not included in the colour chart +30%
- Colours according to samples request feasibility and cost estimate
- PLATED finishes NOT available

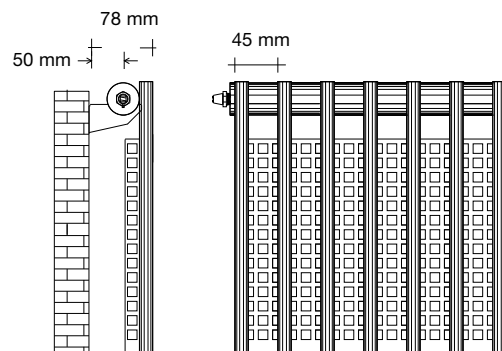

**SUPPORTS**

The radiators are supplied with standard supports (code ST) that include wall fixing shelves. On request you can order them with bracket supports permanently welded on the radiators, which must be specified when placing the order and have the following codes and costs:

- Right side WALL bracket supports (code MD) €
- Left side WALL bracket supports (code MS) €
- CEILING bracket supports (code SO) €

For radiators the prices of bracket supports include the special OB2 or B2M connectors if required

**LIMITS**

- WALL TYPE bracket support Max. 13 elements (Max. Length 58,5 cm)
- CEILING TYPE bracket support Max. 17 elements (Max. Length 76,5 cm)

| Model     | N° elements | H (cm) | L (cm) | Thermal yield               |                             | Category C0 RAL 9010 (€) | Category C1 (€) | Category C3 (€) | Water Content (l) |
|-----------|-------------|--------|--------|-----------------------------|-----------------------------|--------------------------|-----------------|-----------------|-------------------|
|           |             |        |        | Watts $\Delta T 50^{\circ}$ | Watts $\Delta T 30^{\circ}$ |                          |                 |                 |                   |
| TV#200007 | 7           | 200,0  | 31,5   | 412                         | 215                         |                          |                 |                 | 1,81              |
| TV#200009 | 9           | 200,0  | 40,5   | 530                         | 276                         |                          |                 |                 | 2,04              |
| TV#200011 | 11          | 200,0  | 49,5   | 647                         | 337                         |                          |                 |                 | 2,49              |
| TV#200013 | 13          | 200,0  | 58,5   | 765                         | 399                         |                          |                 |                 | 3,35              |
| TV#200015 | 15          | 200,0  | 67,5   | 883                         | 460                         |                          |                 |                 | 3,37              |
| TV#200017 | 17          | 200,0  | 76,5   | 1001                        | 522                         |                          |                 |                 | 4,38              |
| TV#200019 | 19          | 200,0  | 85,5   | 1119                        | 583                         |                          |                 |                 | 4,90              |
| TV#200021 | 21          | 200,0  | 94,5   | 1236                        | 644                         |                          |                 |                 | 5,42              |
| TV#100021 | 21          | 100,0  | 94,5   | 618                         | 322                         |                          |                 |                 | 2,47              |

**VALVES**


For valves and Lockshield see page 271 - 272 - 273 - 274 - 275.

**CONNECTORS**

The TEKNO model is always supplied with "OC1" connectors. Should different connectors be required, such connectors must be strictly specified in the order. In the case of "OB2" connectors, the radiator can be equipped with 2 1/8" chrome-plated plugs on the head of the manifolds.


**Standard connectors**

standard connector always supplied, if not otherwise specified in the order




**Custom-made connectors**

Connectors available on request WITH additional charge of €



**Custom-made connectors**

Connectors available on request WITH additional charge of €



Specify "d" and "i"

► = Position of connectors S = Air Vent I = Interaxis (Pipe centre) between connectors

**Connectors on request**

Connectors available on request WITHOUT any additional charge

