
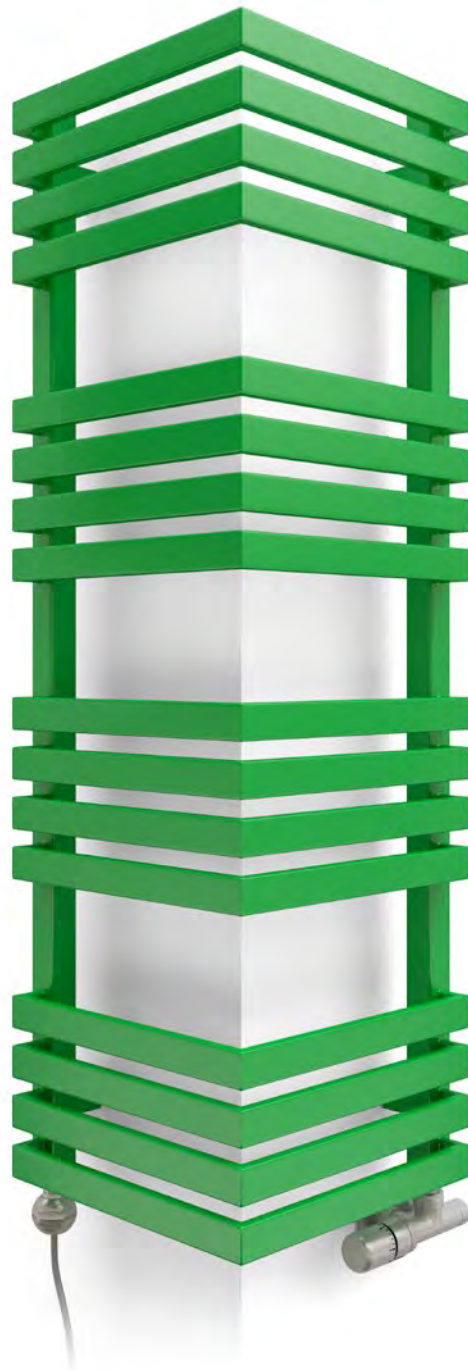


# Outcorner



 colour included  
in the price



**Outcorner** 1005↓ × 300↔ SX  
colour: RAL 6037

Angled integrated thermostatic valve set with immersion tube, right, satin  
Integrated pipe-masking set, satin  
REG 2 heating element, silver



**TERMA**  
SINCE 1990





colour included  
in the price


Design : *Terma*

## Standard connection:

A  $\updownarrow$  465÷1545:




Electric radiators:




## Optional connection:


A  $\updownarrow$  465÷1545:




A  $\updownarrow$  735÷1545:



## Available sizes:



465 x 300  
 $\updownarrow$   $\leftrightarrow$



735 x 300



1005 x 300






1275 x 300



1545 x 300

## Specification:

Working pressure: 1000 kPa    Maximum operating temperature: 95°C


A $\updownarrow$ [mm]	B $\leftrightarrow$ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product code <small>Configuration code p. 5</small>
465	300	195	294	160	300	195	315	76	1,56	5,51	WGQON046030
735	300	195	421	228	400	195	585	76	2,39	8,37	WGQON073030
1005	300	195	547	294	600	195	855	76	3,22	11,23	WGQON100030
1275	300	195	673	361	800	195	1125	76	4,05	14,09	WGQON127030
1545	300	195	799	428	800	195	1395	76	4,89	16,95	WGQON154030



colour included  
in the price

## Technical drawing:


**SX**

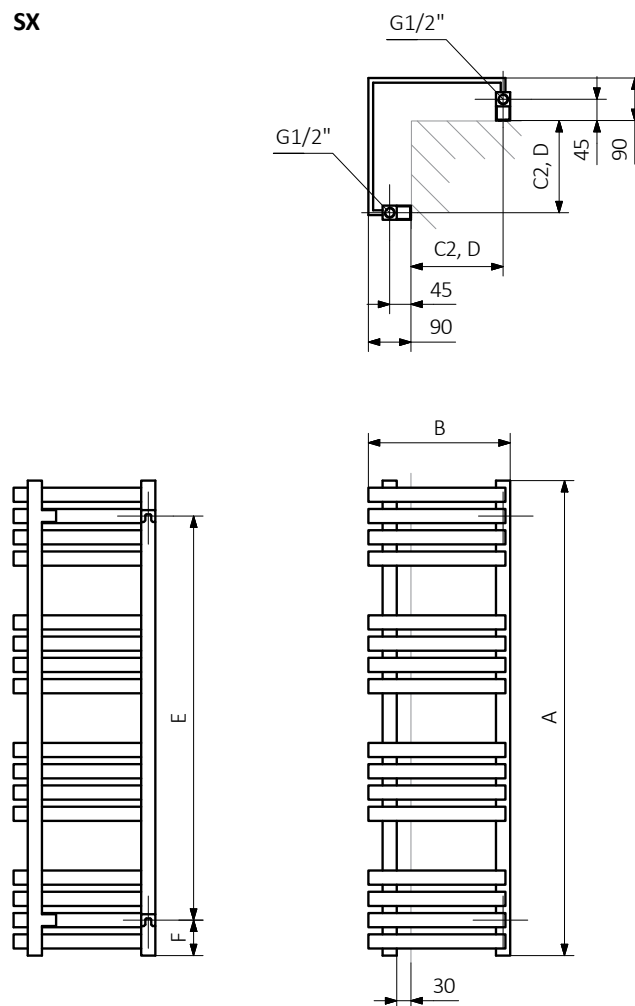

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres  
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

**Collector :**

**Pipe :**





colour included  
in the price

In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

## The construction of a water and dual fuel radiator product and configuration code:

WGQON046030

K916SX

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

### Example Configuration

**K 916 SX**

Package code    Colour code    Connection code  
*K - carton box*

## Construction of electric heater configuration code:

WLQON046030

K916E1DRYW

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

### Example Configuration

**K 916 E1 DRY W**

Package code    Colour code    Connection code    Heating element code    Type of heating element cable code  
*K - carton box*

## Epoxy primer

**E** – Code of epoxy primer is an extra processes.

WGQON046030 K916SX **E** — Extra processes or additions code



colour included  
in the price

## Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.