


# Tune VWS




colour included  
in the price

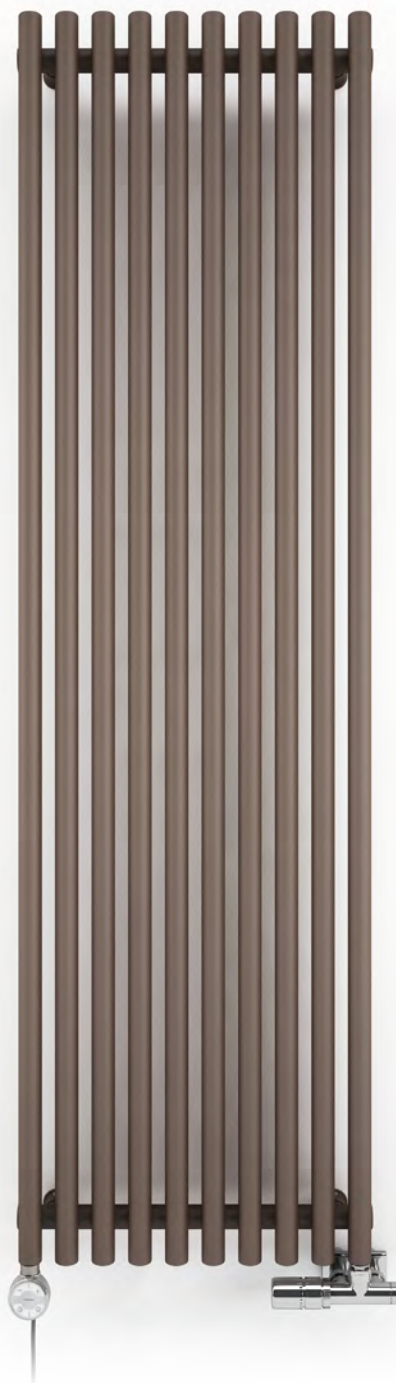

**Tune VWS** 1800↑ × 490↔ SX  
colour: Noble Brown


Angled integrated thermostatic valve set with immersion tube, right, chrome  
Integrated pipe-masking set, chrome  
MOA heating element, chrome






## Standard connection:

A ↓ 600÷1800:




A ↓ 1800:





## Optional connection:



A ↓ 600÷1800:



A ↓ 600:



A ↓ 1800:




## Specification:

Working pressure: 1000 kPa    Maximum operating temperature: 95°C










A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	C3 [mm]	75/65/20°C [W]	55/45/20°C [W]	☺ [W]	D [mm]	E [mm]	F [mm]	📄 [dm³]	📖 [kg]	Product code <small>Configuration code p. 7</small>
600	590	50	550	500	450	240	400	490	500	50	5,77	8,57	WGTSV060059
600	790	50	750	500	602	321	600	690	500	50	7,69	11,37	WGTSV060079
600	990	50	950	500	752	401	800	890	500	50	9,62	14,16	WGTSV060099
600	1190	50	1150	500	902	481	1000	1090	500	50	11,54	16,96	WGTSV060119
600	1390	50	1350	500	1053	561	1000	1290	500	50	13,47	19,75	WGTSV060139
600	1590	50	1550	500	1203	641	1200	1490	500	50	15,26	22,26	WGTSV060159
1800	290	50	250	1700	608	305	600	190	1700	50	7,83	11,23	WGTSV180029
1800	490	50	450	1700	1014	509	1000	390	1700	50	13,06	18,60	WGTSV180049
1800	690	50	650	1700	1420	713	1500	590	1700	50	18,29	25,96	WGTSV180069

# Tune VWS



 colour included  
in the price

## Available sizes:

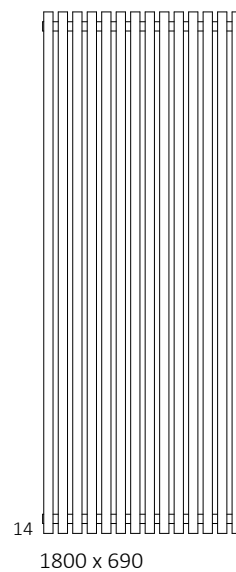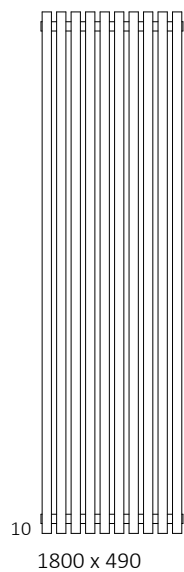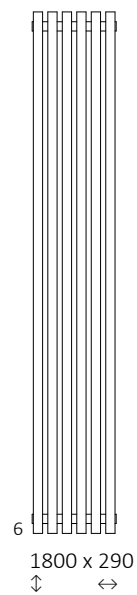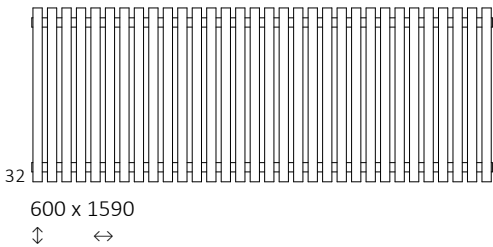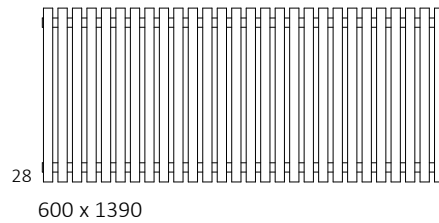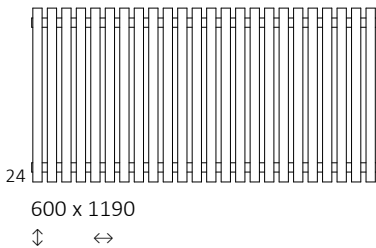





colour included  
in the price

## Technical drawing:


**SX**

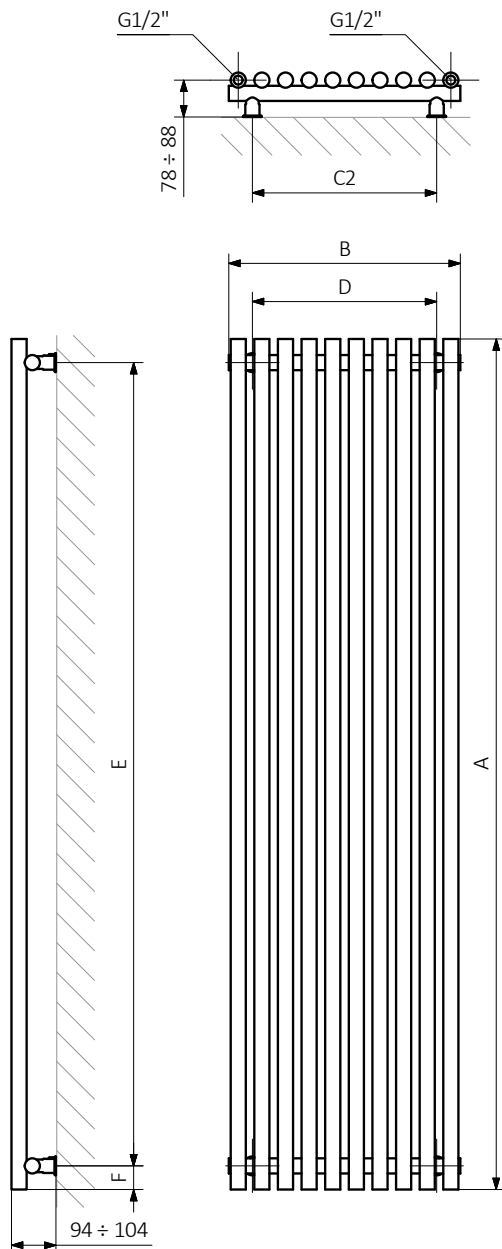


**ZX**



**Z1**

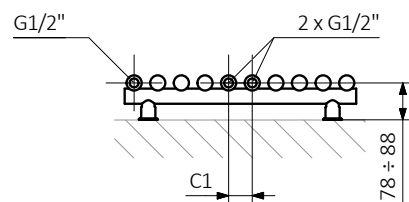


**Z8**

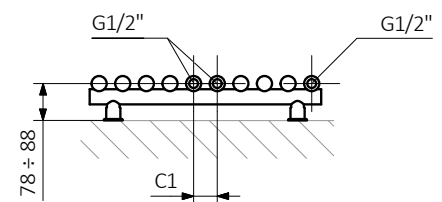

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres  
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

**Collector :**






colour included  
in the price

## Technical drawing:


PX


LX

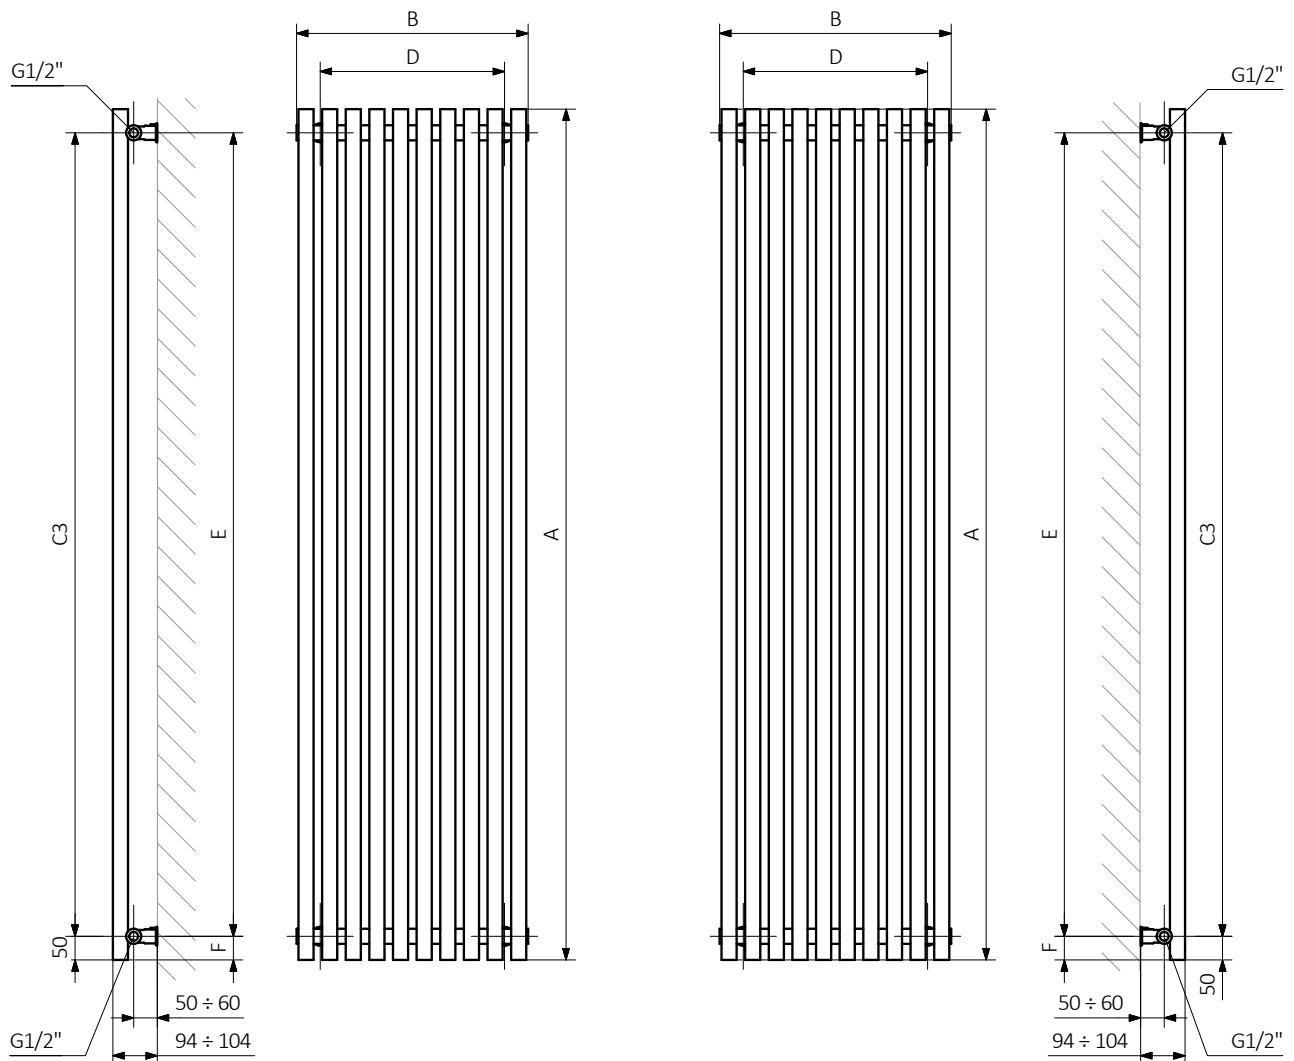

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres  
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector :





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

## The construction of a water and dual fuel radiator product and configuration code:

WGTSV060059

PRODUCT CODE  
(located in the table for the product)

K916SX

CONFIGURATION CODE  
(supplemented by hand)

### Example Configuration

**K** **916** **SX**

Package code

*K - carton box*


Colour code

Connection code

## Epoxy primer

**E** – Code of epoxy primer is an extra processes.

WGTSV060059 K916SX **E** — *Extra processes or additions code*



## Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional p Colour included ayment for a color.