Quadrus Slim

colour included in the price

Quadrus Slim 1185↕ × 450↔ E1
colour: Silver Matt

REG 2 heating element, white

Quadrus Slim

colour included in the price

Design : *Terma*

Standard connection:

Electric radiators:



Optional connection:

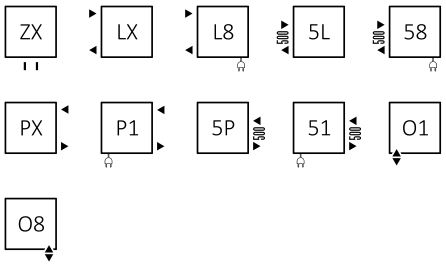

Available sizes:



870 x 450



870 x 600

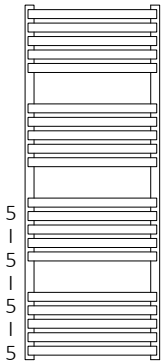

1185 x 450

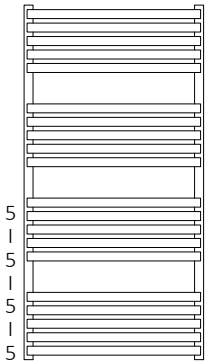

1185 x 600

Specification:

Working pressure: 1000 kPa Maximum operating temperature: 95°C

A ↕ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75|65|20°C [W]	55|45|20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product code Configuration code p. 5
870	450	50	420	409	217	400	420	690	90	2,60	8,81	WGQUS087045
870	600	50	570	559	296	600	570	690	90	3,03	10,81	WGQUS087060
1185	450	50	420	537	278	600	420	1005	90	3,50	11,76	WGQUS118045
1185	600	50	570	733	379	800	570	1005	90	4,07	14,43	WGQUS118060

Quadrus Slim

colour included in the price

Technical drawing:

SX

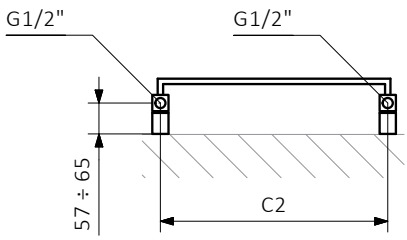

Z1

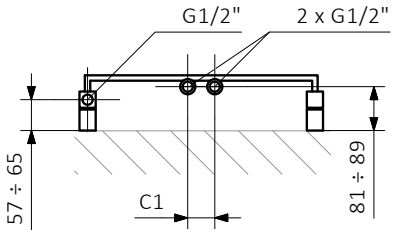

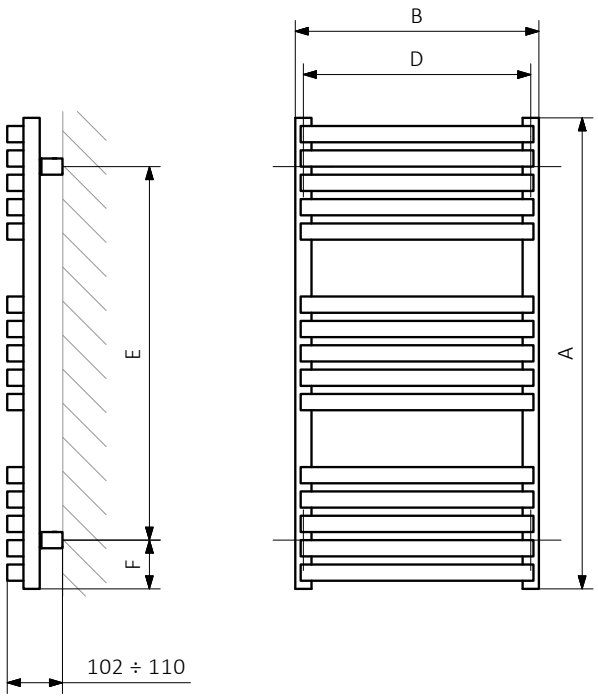

Z8

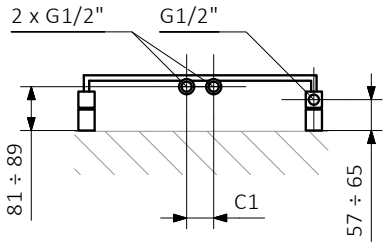



A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector :



Pipe :



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGQUS087045

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

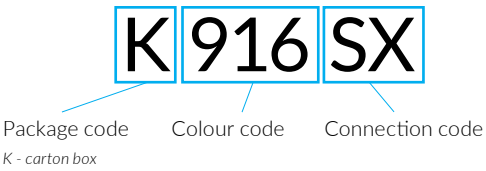

Construction of electric heater configuration code:

WLQUS087045

PRODUCT CODE
(located in the table for the product)

K916E1DRYW

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGQUS087045 K916SX E — *Extra processes or additions code*

Quadrus Slim

colour included in the price

Legend

Radiator available in a “water” version.

Radiator suitable for dual fuel connection. Electric heating element can be installed.

Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.

Suggested heating element power output for electric and dual fuel versions.

Weight.

Capacity.

Available in chrome finish.

No additional payment for a color.