



PAGE
height 1770 mm, length 500 mm. Quartz 1 finish (cod. 1C).



Technical features:

- steel towel warmer radiator with flat tube elements
- side manifolds with 70x11 mm flat section
- horizontal tubes with 70x11 mm flat section
- threading for water connection at the center of the radiator, pitch 50 mm, right Gas 1/2"
- maximum working pressure 4 bar
- maximum working temperature 95°C


Price included:

- wall fitting
- 3/8" air vent


Finishes available	Surcharge
Standard White	
Special finished	


Finishing codes see page 596.

Standard connections



Connection dimensions with IRSAP valves



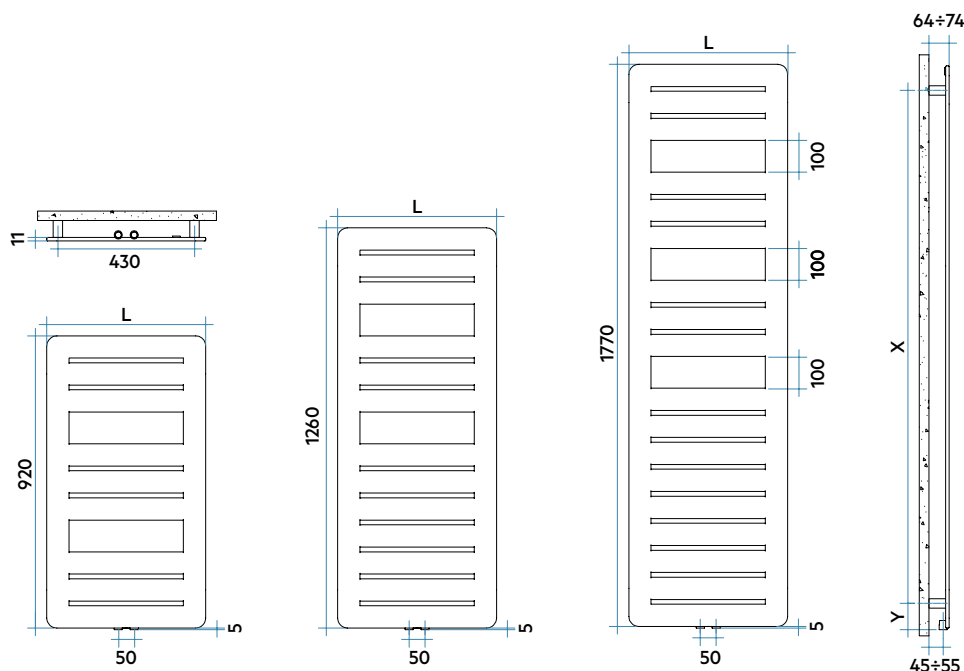

H mm	X mm	Y mm	L mm
920	765		
1260	1105	82.5	500
1770	1615		



Model	Code	Depth mm	Height mm	Width mm	Conn. C. mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Btu/h Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt		
920 9 rails 2 espaces	PGS050 B 01 IR 05 NNN	11	920	500	50	12,4	2,3	1351	396	300	209	126	1,250
1260 13 rails 2 espaces	PGM050 B 01 IR 05 NNN	11	1260	500	50	16,7	3,2	1815	532	403	282	171	1,240
1770 18 rails 3 espaces	PGL050 B 01 IR 05 NNN	11	1770	500	50	24,4	4,6	2515	737	561	395	241	1,220

(*) Thanks to the high performance of Irsap PAGE radiators, the ideal Δt for low temperature projects is Δt at 30°C .
For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Key Codes

Standard White colour code -
for different colour codes see the colors page

Width


Height

Packing code


Water connection code for 50 mm
central fittings on the last down tube

PG S 050 B 01 IR 05 NNN

Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566

