



**SOUL\_S**  
height 1540 mm, length 550 mm. Pearl White finish (cod. 16).

**Technical features:**

- steel towel warmer radiator
- horizontal elements featuring rectangular 50x10 mm section tubes
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C
- 50 mm connection
- not suitable for installation with a single-pipe system

**Price included:**


- 4 wall fixing in the same color as the radiator
- 2 1/2" hidden air vents complete with valve cover

Finishes available	Surcharge	Connection dimensions with IRSAP valves
Standard White		
Classic finished		
Special finished		
Other RAL colors		


Finishing codes see page 596.

**50 mm REVERSIBLE connection**

The radiator can be installed with the 50 mm headers on the left or right by simply rotating the product by 180°.








Type with collectors on the left  
Hydraulic connection 50 mm

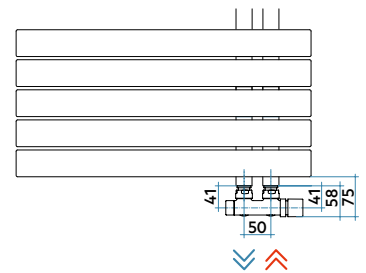


Type with collectors on the right  
Hydraulic connection 50 mm

**TYPICAL INSTALLATION FOR ALL RADIATORS USING A TEE**

“A” quota for IRSAP angle pattern valves and lockshield valves = 40 mm

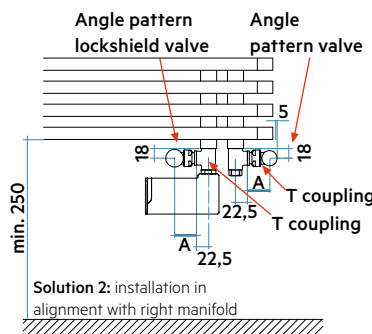

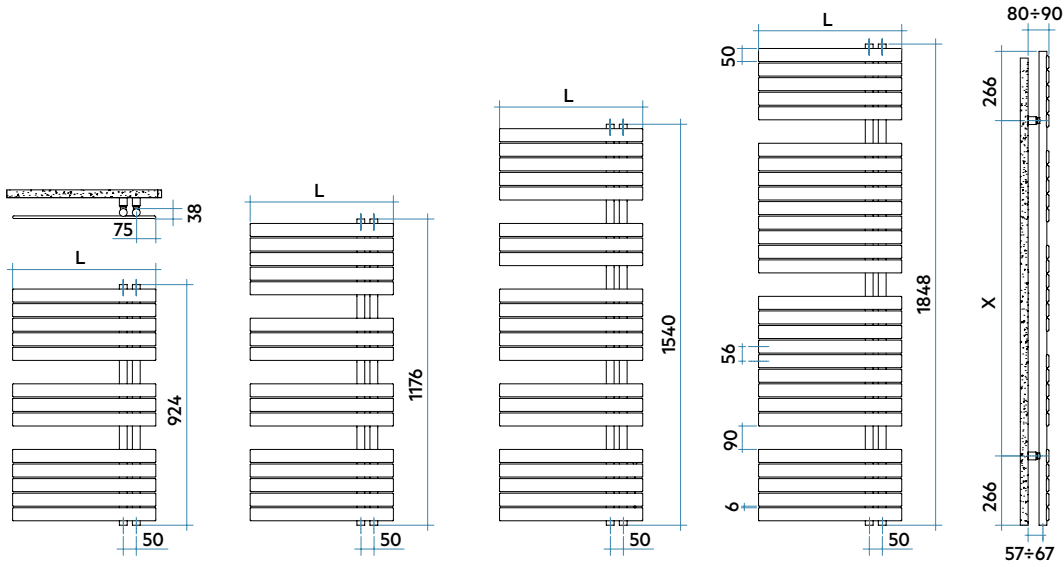

L mm	H mm	X mm
550	924	392
	1176	644
	1540	1008
	1848	1316



Model	Code	Depth mm	Height mm	Width mm	Conn. centre mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt		
924 13 rails 2 espaces	<b>URP055 B 01 IR 01 NNN</b>	38	924	550	50	9,4	3,2	1391	<b>408</b>	309	<b>216</b>	130	1,245
1176 16 rails 3 espaces	<b>URS055 B 01 IR 01 NNN</b>	38	1176	550	50	11,5	4,1	1723	<b>505</b>	379	<b>262</b>	155	1,286
1540 21 rails 4 espaces	<b>URM055 B 01 IR 01 NNN</b>	38	1540	550	50	15,0	5,3	2235	<b>655</b>	491	<b>338</b>	200	1,295
1848 28 rails 3 espaces	<b>URE055 B 01 IR 01 NNN</b>	38	1848	550	50	19,4	7,3	2815	<b>825</b>	616	<b>423</b>	248	1,310

Mix. Funct.	Code
400	<b>ANRES400WDI</b>
400	<b>ANRES400WDI</b>
700	<b>ANRES700WDI</b>
1000	<b>ANRES1000WDI</b>

Electric heater for Dual Power

BATHROOMS  
RADIATORS


(\*) Thanks to the high performance of Irsap SOUL\_S radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at  $30^{\circ}\text{C}$ .

For  $\Delta t$  different from  $50^{\circ}\text{C}$  use the formula:  $Q=Q_n (\Delta t / 50)^n$


To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1540 x 550: **URM055 B 01 IR 01 NNN** (€ 478,00) + **ANRES700WDI** (€ 183,57) = Tot. € 661,57


### Key Codes

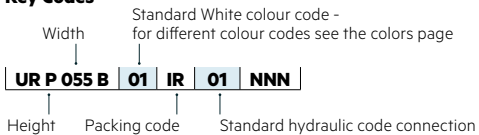


### Decorative & Technical Accessories



Kit Valves and Lockshield valve  
Pag. 562



Pipe cover kit  
Pag. 566



Electronic Control  
Pag. 574

